


# WHO COMPLIANT VACCINE MONITORING

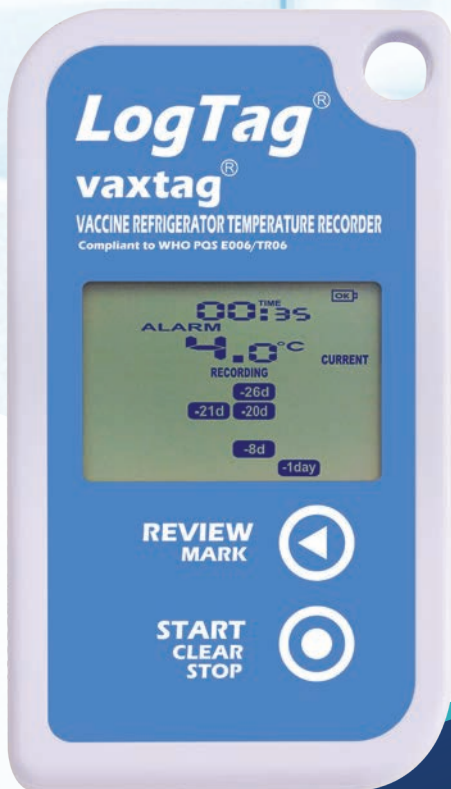

Vaxtag

30 Day Display Refrigerator Temperature Recorder


**LogTag Recorders**




The LogTag® vaxtag features a data logging memory storing up to 7770 temperature readings and a separate rolling 30 day statistical max/min reading and duration memory.

The LogTag® vaxtag is intended for use as the principle means for monitoring storage conditions in vaccine refrigerators in intermediate stores and health facilities and is specifically configured and packaged to be compliant to the World Health Organisation (WHO) PQS specification E006/TR06.3.

## Accessories



*Wall Mount*  
Not Included



*Protective Enclosure*  
Not Included



*LTI-HID*  
Not Included



*LTI-WiFi*  
Not Included

# Features

---



Certified compliant to WHO PQS specification E006/TR06.3.



Real time clock records time & temperature simultaneously.



Stores up to the last 7770 time stamped temperature data for later download.



Allows review of current day and up to 29 previous days of statistical data.



Records temperature from  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$



The Vaxtag is preconfigured with high and low alarm settings (Please refer to specifications table).



Displays alarm triggers in calendar-like format for up to the last 30 days.



Fixed battery of 1 year storage, followed by 2 year of operation with normal use

# Applications



Transportation



Vaccine Storage & Transportation



Laboratories



Pharmaceuticals



Medical Centre



# Specifications

<b>Product Model</b>	TRID30-7FW (Vaxtag).
<b>Sensor Measurement Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Operating Temperature Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Storage Temperature Range</b>	-10°C to +40°C (-14°F to +104°F).
<b>Rated Temperature Reading Accuracy</b>	Better than $\pm 0.5^{\circ}\text{C}$ ( $\pm 0.9^{\circ}\text{F}$ ) for measurements from -20°C to +40°C (-4°F to +104°F), typically $\pm 0.3^{\circ}\text{C}$ (0.6°F). Better than $\pm 0.8^{\circ}\text{C}$ ( $\pm 1.5^{\circ}\text{F}$ ) for other measurements - typically $\pm 0.5^{\circ}\text{C}$ (0.9°F). <i>Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration.</i>
<b>Rated Temperature Reading Resolution</b>	0.1°C(0.2°F) for measurements -30°C to +40°C (-22°F to +104°F). 0.2°C(0.4°F) for measurements above +40°C (+104°F). <i>LogTag Analyzer® currently displays to one decimal place of °C or °F. The native resolution is what is stored in the LogTag®.</i>
<b>Sensor Reaction Time</b>	Typically less than 5 minutes (T90) in moving air (1m/s).
<b>Recording Capacity</b>	7770 temperature readings. 32 days @ 6min logging Day summary statistics memory (for display on LCD): up for 30 days of Max/Min and duration values.
<b>Sampling Interval</b>	Factory set to 6 minute interval.
<b>Logging Start Options</b>	Factory set to Push button start.
<b>Recording Indication</b>	State indicator "RECORDING"
<b>Download Time</b>	Typically less than 5 seconds for full memory (7770 readings), depending on computer or readout device used.
<b>Environmental</b>	IP65 (roughly equivalent to NEMA 4) when vertically mounted or hung.
<b>Power Source</b>	CR2450 3V LiMnO <sub>2</sub> (Fixed Battery).
<b>Alarm Triggering</b>	Low alarm : Exposure to a single temperature event of -0.5°C or below for 60 minutes High alarm: Exposure to a single temperature event of +8°C or above for 10 hours
<b>Battery Life</b>	1 year storage, followed by 2 year of operation with normal use (6 minute logging, statistics reviewed on the display no more than once daily for no longer than 30 seconds each time, download data monthly).
<b>Real Time Clock</b>	Built-in real time clock. Rated accuracy $\pm 25\text{ppm}$ @ 25°C (equivalent to 2.5 seconds/day). Rated temperature coefficient is $-0.034 \pm 0.006\text{ppm}/^{\circ}\text{C}$ (I.e typically +/- 0.00294 seconds/day/°C).
<b>Size</b>	93mm(H) x 54.5mm(W) x 8.6mm(T).
<b>Weight</b>	43g.
<b>Case Material</b>	Polycarbonate.

