

# LogTag Recorders



## TRIX-16 Multi-Use Temperature Recorder

Using the LogTag® Interface and the freely available companion software LogTag Analyzer, the LogTag® is easily set-up for recording conditions including delayed start, sampling interval, number of readings, continuous or fixed number of readings and configuration of conditions to activate the ALERT indicator.

Readings are downloaded using LogTag Analyzer, which provides facilities for charting, zooming, listing data statistics and allows exporting the data to other applications such as Excel.

The LogTag® TRIX-16 is a versatile, wide range, multi-trip Temperature Recorder, featuring high resolution temperature readings over a measurement range of -40°C to +85°C (-40°F to +185°F) with a large memory.


Enclosed in a robust and durable polycarbonate case, the TRIX-16 is equipped with a unique external temperature sensor arrangement, providing fast reaction time to temperature change. It features a real time clock, which provides date/time stamps for each temperature reading.

The LogTag® TRIX-16 complies with the relevant international standards for temperature monitoring devices, such as FCC, CE, C-TICK and RoHS. This not only demonstrates the quality of the LogTag® TRIX-16, but underlines its suitability for temperature monitoring applications where accuracy and consistency is required.


### Product Highlights

- A real time clock provides date/time stamps for each temperature reading.
- Push-to-start button with optional delay, or start at a specific time & date.
- Comprehensive customisation options including alert settings, sample interval and trip duration.
- Robust and durable polycarbonate case with lug for secure mounting.
- Up to 16,159 recordings - enough for even the longest trip.
- In-transit inspections can be recorded at the push of a button.
- Industry best download time - less than 5 seconds for full memory.

### Recommended Applications

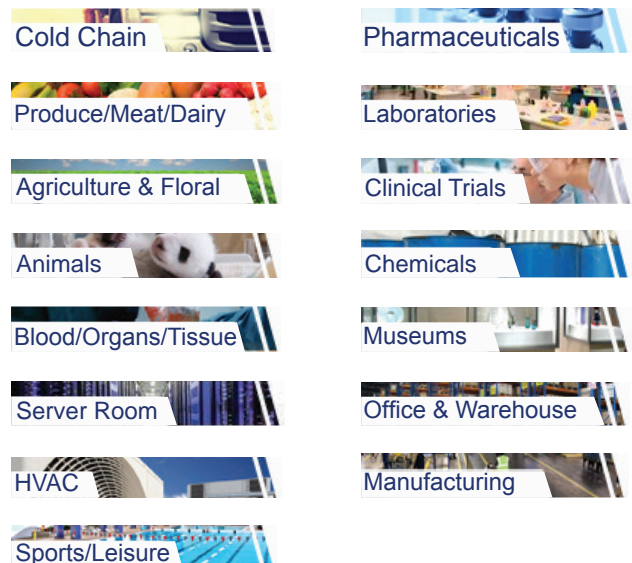

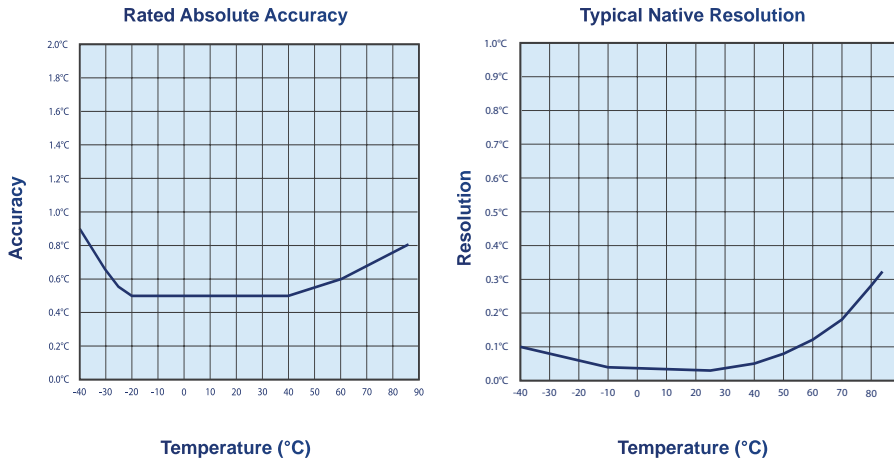


## Accuracy/Resolution Charts



## Specifications

<b>Product Model</b>	TRIX-16
<b>Measurement Range</b>	-40°C ~ +85°C (-40°F ~ +185°F)
<b>Rated Absolute Accuracy</b>	Better than ±0.5°C for -20°C to +40°C. Better than ±0.7°C for -30°C to -20°C & +40°C to +60°C Better than ±0.8°C for -40°C to -30°C & +60°C to +85°C
<b>Capacity</b>	16,159 temperature readings (32K bytes memory)
<b>Sampling Interval</b>	Configurable from 30 seconds to several hours
<b>Environmental</b>	IP65 (roughly equivalent to NEMA 4)
<b>Power Source</b>	3V Lithium (non-rechargeable, replaceable by qualified technician)
<b>Battery Life</b>	2~3 years typical use – longer (up to 5-10 years) if recorder is hibernated between uses.
<b>Size</b>	86mm (H) x 54.5mm (W) x 8.6mm (T)
<b>Weight</b>	35g
<b>Case Material</b>	Polycarbonate

## Compliance & Certifications

	Designed to support Digital Signatures in accordance to FDA CFR21 Part 11.
	Tested and complies with FCC Part 15 Subparts A and B. Tested and complies with EC EMC directives (EN 50081-1:1992 & EN 61000-6-1:2001)
	Conforms to RoHS (Restriction of the use of certain Hazardous Substances in electrical and electronic equipment) EU Directive.

## Accessories



Protective Enclosure



Wall Mount Bracket

Our FREE LogTag Analyzer software provides an easy to use, powerful platform for configuring any LogTag® recorder product before deployment, and for data download & analysis when the recorder is retrieved.



LogTag's unique interface cradle design provides rapid & reliable transfer for logged data. It accepts all non-USB recorder models, allowing a single interface to be used across the entire range.

